


new

# Tarasafe™ Ultra H<sub>2</sub>O


High performance slip resistant safety flooring for wet and dry, barefoot and shod applications

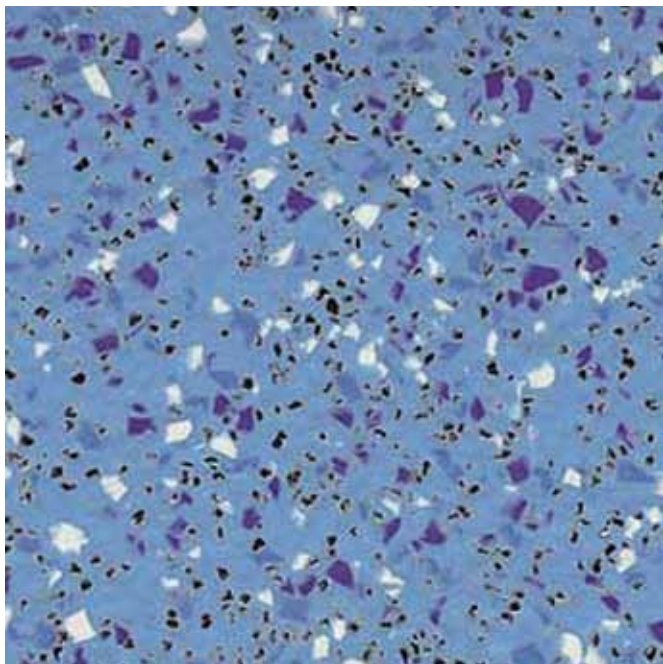

48 HR DELIVERY




7413 Ocean Blue  
WR: 0585 0482 / LRV: 32.5




48 HR DELIVERY

7325 Seashore  
WR: 0585 2416 / LRV: 59.6




48 HR DELIVERY

7314 Sand  
WR: 0585 0242 / LRV: 40.2



48 HR DELIVERY

7513 Seagrass  
WR: 0585 2435 / LRV: 35.5




48 HR DELIVERY

7418 Marine  
WR: 0585 0190 / LRV: 23.6




48 HR DELIVERY

7720 Iceberg  
WR: 0585 2415 / LRV: 59.1



48 HR DELIVERY

7746 Stone  
WR: 0585 2420 / LRV: 25.4



48 HR DELIVERY

7732 Gravel  
WR: 0585 2436 / LRV: 10.1



This range complements the Tarasafe™ Ultra collection (see reverse).



WR: Welding Rods  
LRV: Light Reflectance Value








## For wet and dry, barefoot and shod applications

Brand new Tarasafe™ Ultra H2O is an enhanced slip resistant safety vinyl floor covering with a raised emboss designed for applications where there are continuous wet areas.

It provides exceptional barefoot comfort and is an ideal solution for shower and changing rooms and any high level risk wet areas where heavy duty safety flooring is required.


A popular choice in the education, healthcare, leisure, hospitality, housing markets and any applications where slip resistance needs to be maintained.

- High level of wet and dry slip resistance
- Complements the popular Tarasafe™ Ultra range

TECHNICAL INFORMATION		Tarasafe™ Ultra H2O	
Thickness	EN 428	mm	2.0
Wear layer thickness	EN 429	mm	1.00
Weight	EN 430	g/m <sup>2</sup>	2400
Width of sheet	EN 426	cm	200
Length of sheet	EN 426	lm	20
Norm / Product specification	-	-	EN 649
European classification	EN 685	class	34 -43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: shod	DIN 51 130	class	R11
Slip resistance wet: barefoot	DIN 51 097	class	C
Slip resistance: pendulum #55	BS 7976-2	PTV	≥ 36
Surface roughness	Rtm/Rz	µm	≥ 20
Slip resistance: ramp test	EN 1345 (annex C)	class	ESb
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 4.0
Wear group	EN 651	-	P
Type binder content	ISO 10582	type	I
Dimensional stability	EN 434	%	≤ 0.40
Residual indentation	EN 433	mm	≤ 0.10
Castor chair test (type W)	EN 425	-	OK
Thermal conductivity	EN 12 524	W/(m.K)	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6
Chemical products resistance	EN 423	-	OK
Anti-bacterial & fungicidal treatment	-	-	Sanosol®
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	<100
	EN 14041	   	




For more information please scan the QR code below or visit: [www.gerflor.co.uk](http://www.gerflor.co.uk)



UK reference - March 2014

Order your free samples now and don't forget to ask for your Tarasafe™ Ultra safety floor

Complementary colour references:

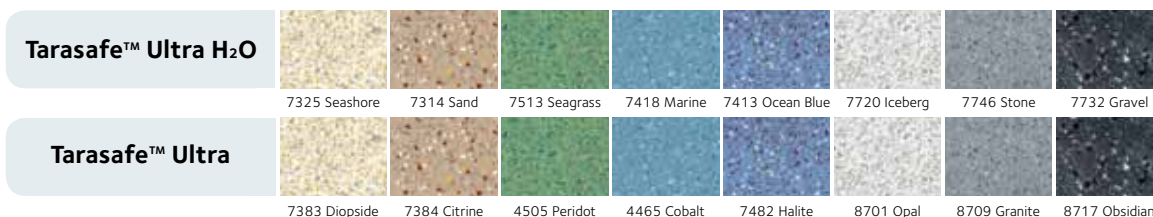

For more information please contact:

United Kingdom: Gerflor Ltd  
 Tel: 01926 622 600  
 Email: [contractuk@gerflor.com](mailto:contractuk@gerflor.com)  
 Visit: [www.gerflor.co.uk](http://www.gerflor.co.uk)

Ireland: Gerflor Ltd  
 Tel: +353 (0) 42 966 1431  
 Email: [gerflorirl@gerflor.com](mailto:gerflorirl@gerflor.com)  
 Visit: [www.gerflor.ie](http://www.gerflor.ie)